


TIMERS

YOU MAY HAVE A TIMER AS PART OF YOUR GATE SYSTEM
BELOW ARE SOME SIMPLE INSTRUCTIONS FOR THE MOST
COMMON CHANGES **Or Download The APP for Easy Programming**

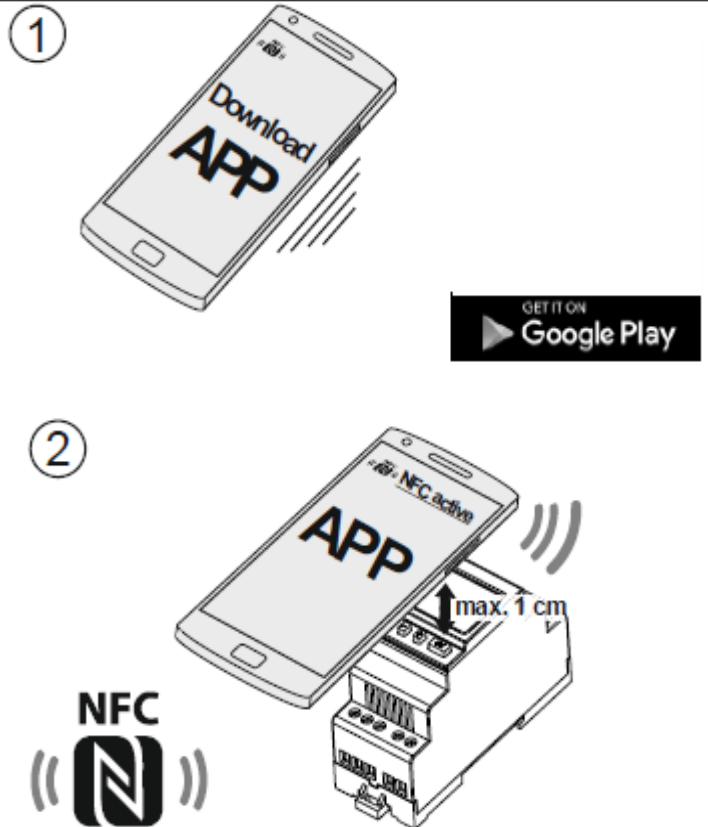

Programme via NFC using the Sangamo Connect android app

TO MODIFY THE PROGRAMME TIMES

Press M, Press OK, Press + Twice ,Press OK Twice.The display will now show The First On Time. Press OK If You Wish To Edit This or Press + until you find the OFF or ON Programme you wish to Edit.

Once you have found the Programme Keep Pressing OK until you find the Flashing Digits You Wish to Change, Then Use The + or – Button To Change And Press OK Twice. Press M Three Times To Exit

To Switch Timer Off Manually

Press Minus – For 3 Seconds

To Switch Back To Automatic Press Minus – For 3 Seconds